

WALL PROFILES

by **gizir**[®]
WOOD PRODUCTS





WALL
PROFILE

WP Slats

SM INDIGO

S066

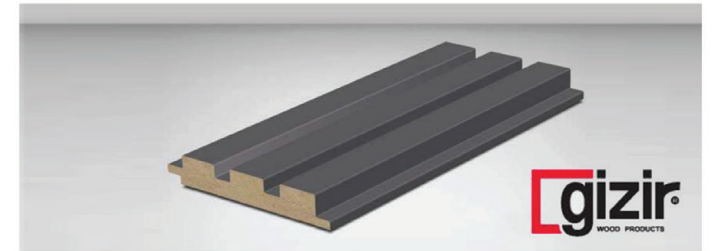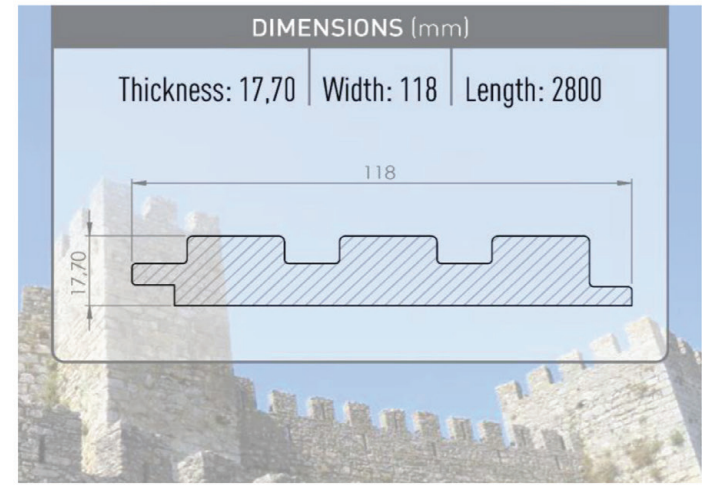

WALL PROFILE
WP 06
SM PISTACHIO | S067





MOUNTED PROFILE



DIMENSIONS (mm)


Thickness: 17,70 | Width: 118 | Length: 2800

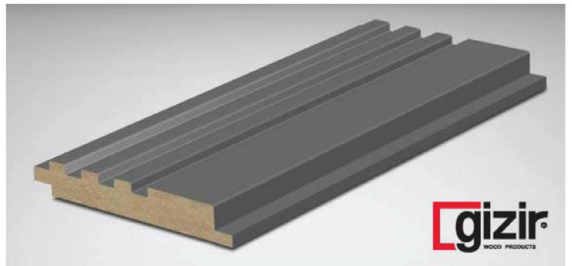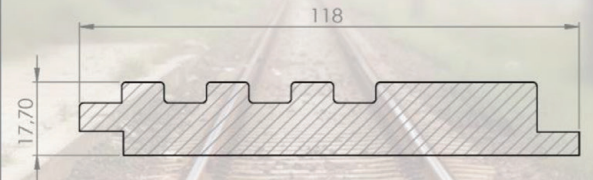

S040



7093



7094






7095

WALL
PROFILE

WP 05

LIGHT WALNUT | 1070

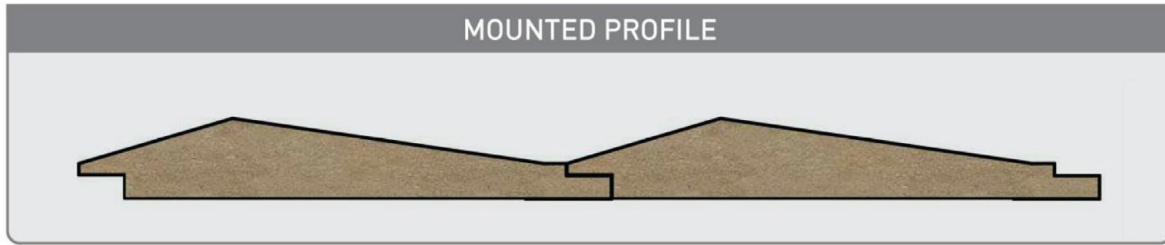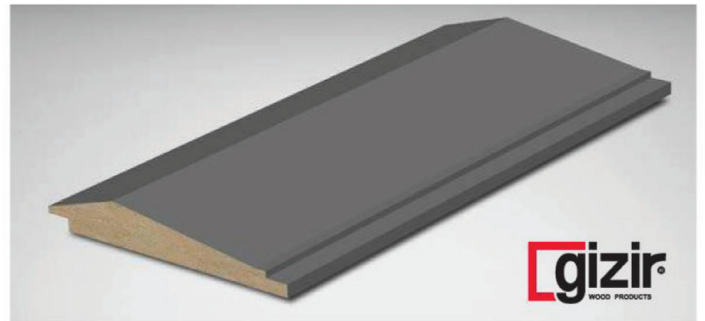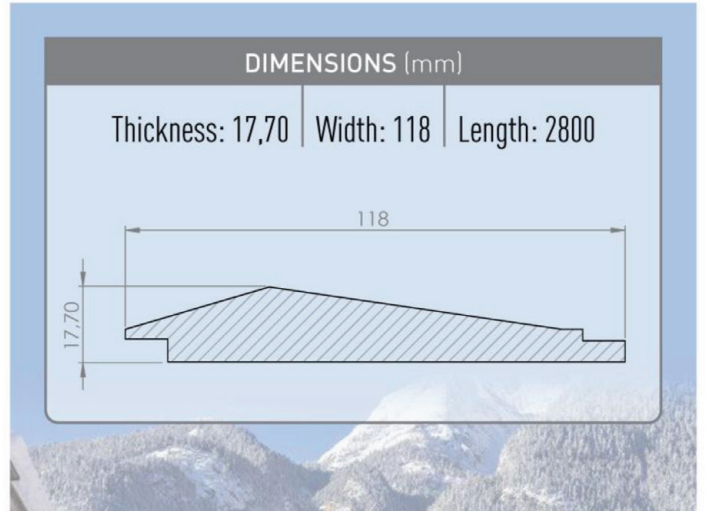

6270



6370

WALL
PROFILE **WP 07**
SM CREAM S020






MOUNTED PROFILE



DIMENSIONS (mm)

Thickness: 17,70 | Width: 118 | Length: 2800

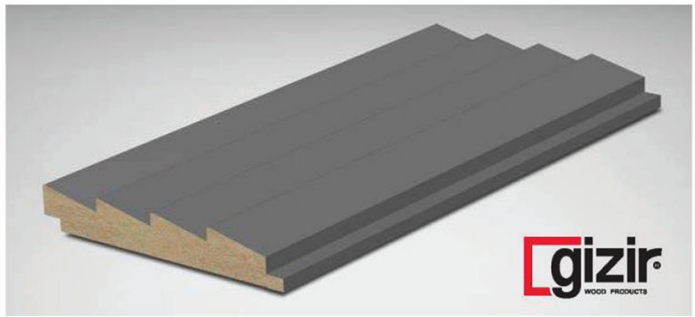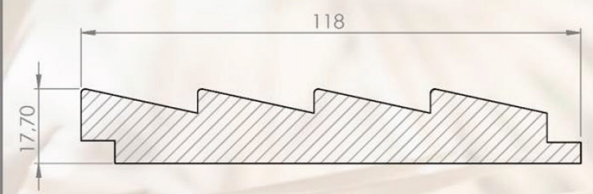

S010

WALL
PROFILE **WP 11**

GOLD INOX | 6370





MOUNTED PROFILE



DIMENSIONS (mm)

Thickness: 17,70 | Width: 118 | Length: 2800

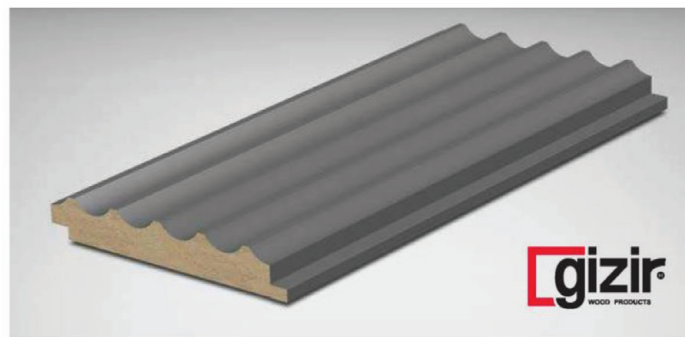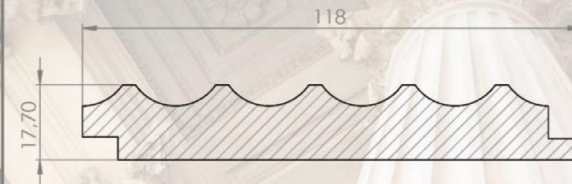

S010



7093



7094


LED WALL PROFILE **WPL 01**

SM MINK S027




MOUNTED PROFILE

led strip light




DIMENSIONS (mm)

Thickness: 18 | Width: 118 | Length: 2800

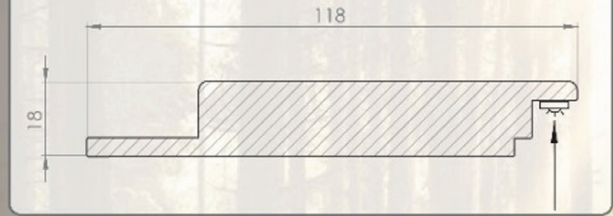

led strip light

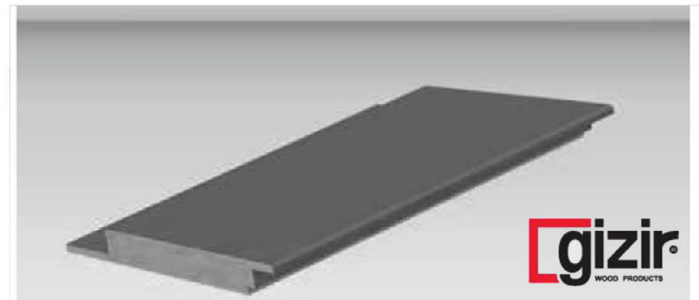

gizir
WOOD PRODUCTS



7093





7094


New

LED WALL PROFILE **WPL 01 S**

LED WALL PROFILE **WPL 01 E**

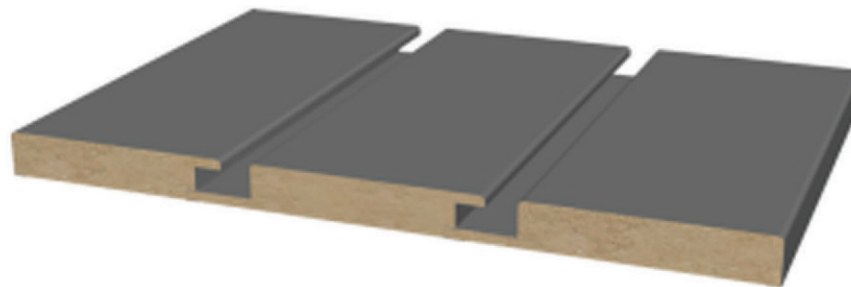

7093



7094

DOUBLE COLOR WALL PANELS


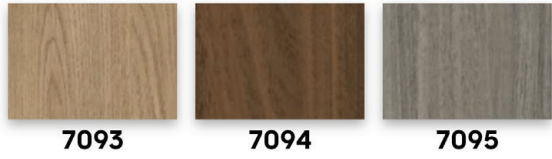
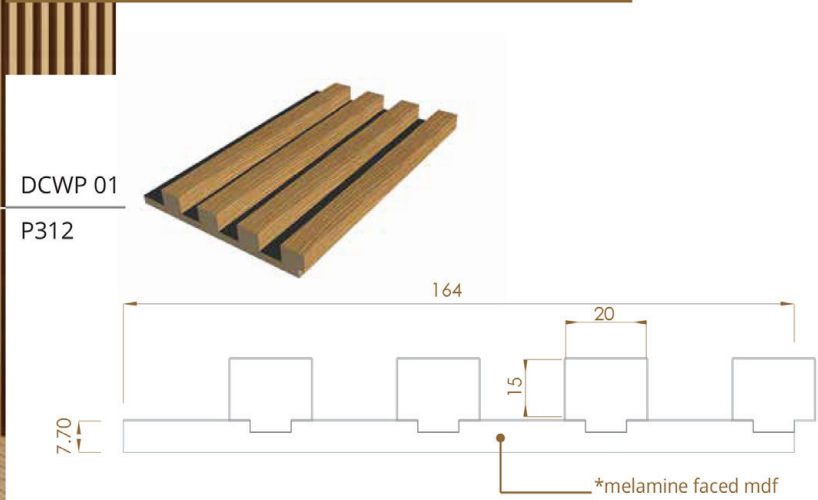
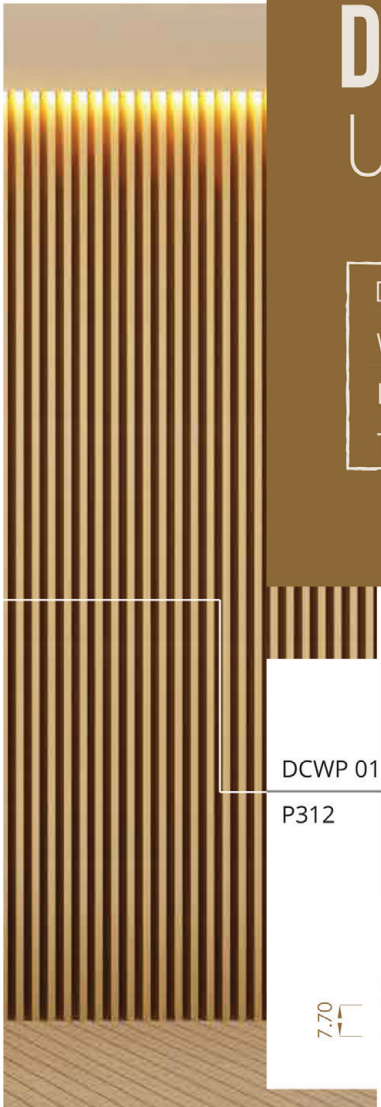


COLOR PALETTE

	
P310	4083
	
P312	4536
	
P316	4528
	
P317	4040

DOUBLE COLOR WALL PANELS

Dimensions (mm)	
Width	170
Length	2800
Thickness	23



Acoustic Panel

Keep Your Secrets
to Yourself




Natural European Oak Veneer &
PVC/PP Options Available!

- A level sound insulator acoustic felt.
- B1 level fire retardant acoustic felt.
- Reduces background noises such as echo and howling.
- Oak veneer option matches perfectly with The Madera Series.
- Easy to cut and apply.

Dimensions (mm)	
Width	605
Length	2800
Thickness	22

*thickness options available



Colección de
madera

0,6 MM NATURAL EUROPEAN OAK
VENEER / PVC-PP OPTIONS

12 MM BLACK COLORED MDF

9 MM PET ACOUSTIC FELT



Decorate in 3 Easy Steps

Measure




Measure the Wall You Want to
Apply Acoustic Panels.

Cut



Cut the Acoustic Panel
According to Wall Dimensions.

Apply



Apply Polyurethane (PU)
Assembly Glue to the Back of the
Acoustic Panel / Or Use a Nail Gun
to Mount it on the Wall.

OAK COLOR COLLECTION



MAP501



MAP503



MAP504



MAP505




7093



7094

PVC / PP COLOR COLLECTION



PAP303



PAP310



PAP312



PAP316




PAP317



PAP1070




ACOUSTIC FELT NRC TEST RESULT (Noise Reduction Coefficient Test)

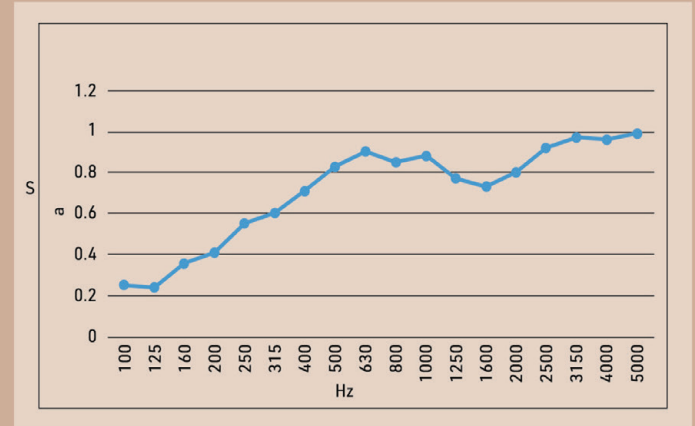


NRC (Noise Reduction Coefficient Test) 0.75
 Flame Spread index 26-75 Class B
 Smoke-Developed index 0-450 Class B


ACOUSTIC FELT FSI 30 RESULT - ASTM E84-2021 standard test method used to assess the surface burning characteristics of a material used for interior wall and ceiling finishes, with results measured by Flame Spread Index (FSI)

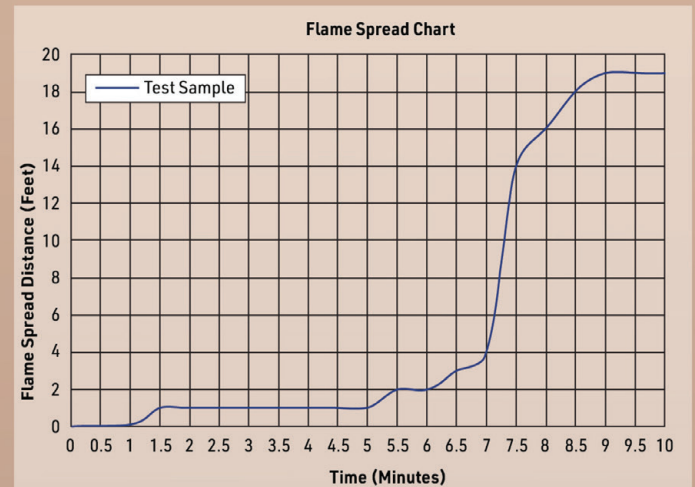


MATTE

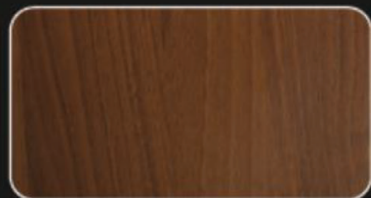


1080 | Dark Walnut

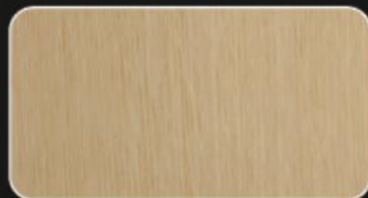


2060 | New Oak

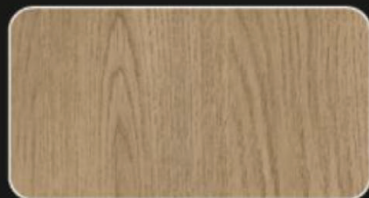

7093 | Amberes Oak Natural

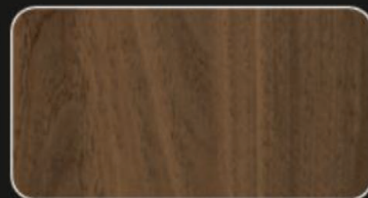

7094 | Nutwood Dark

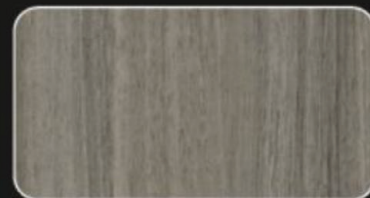

7095 | Dabema Walnut Grey


SUPER MATTE



S010 | Super Matte White



S036 | Super Matte Dark Grey

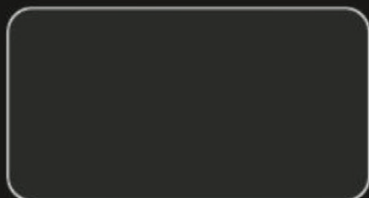

S040 | Super Matte Black


ULTRA HIGH GLOSS



6010 | Ultra High Gloss White



6270 | Uhg New Metallic Inox

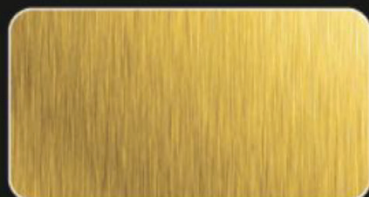

6370 | Uhg Gold Inox

Gizir Wall Profiles
Available Colours



**EGYPT, CAIRO, BLOCK 12 & 13,
SAAD 5, EL KATAMEYA**

+20 110 3052645

info@woodandwoodegypt.com

www.woodandwoodegypt.com